

# SYMMETRICALLY BALANCED 3-LAYER OAK FLOORING

[www.ecowood.eu](http://www.ecowood.eu)

[www.3layerflooring.com](http://www.3layerflooring.com)

## TECHNICAL DATA

**Top layer:** European Oak (*Quercus robur*), thickness 4.0 mm

**Middle layer:** HQ water resistant birch plywood, thickness 6.5 /12.0 mm

**Base layer:** Finger-jointed oak, thickness 4.0 mm

Available thickness: 14,5 / 20 mm

Available widths: 115, 140, 180, 240 mm

Random lengths: 850-2400 mm

Grading: Select/Premium, Nature, Rustic




## BESPOKE FLOORING



More than 24 colours available



Brushing




Cross Brushing




Distressing


## Various laying patterns



Chevron, 45°



Herringbone, 90°

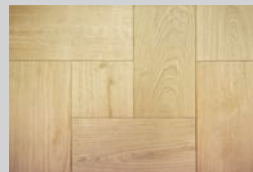


Rectangles & Blocks

## FEATURES and ADVANTAGES

- Symmetrically Balanced, 3-Layer construction guarantees minimized wood shrinkage and swelling.
- Maintains maximum stability with room environment moisture changes.
- Advanced Symmetrical 2 x OAK construction leads to +15% heating efficiency.
- The best solution you need for underfloor heating systems.
- Extra strong and environmentally friendly PUR adhesive used for multilayer structure glueing - no delamination of multilayers.

### Symmetrically Balanced. 2 x OAK construction

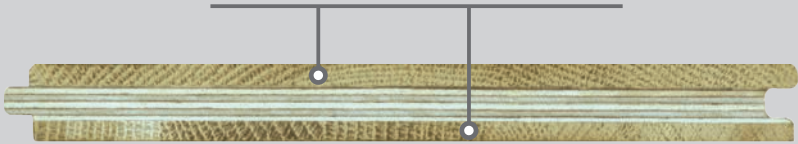

The best solution you need for underfloor heating systems



DOUBLE OAK



MAXIMUM  
STABILITY



PERFECT FOR  
UNDEFLOOR  
HEATING



WIDE PLANKS



RICH COLOUR  
PALETTE



# SYMMETRICALLY BALANCED 3-LAYER OAK FLOORING

The best solution you need for underfloor heating systems



**ECOWOOD UAB**  
Statybininku str. 1  
LT-54222 Vilkija, Lithuania

Phone: +370 37 55 61 33  
E-mail: [ecowood@ecowood.eu](mailto:ecowood@ecowood.eu)  
[www.ecowood.eu](http://www.ecowood.eu)

